



ASTRELIGHTS INC

OUTDOOR LIGHTING- CP02G

LED GARAGE CANOPY LIGHT



Descriptions

LED canopy lights are versatile and energy saving fixtures, which are ideal for parking garages, entryways, gas stations, outdoor aisles and many other commercial applications. It comes with color and wattage selectable, allowing you to customize the LED light output to best fit your project. Energy and maintenance savings up to 86% versus HID solutions, and can be easily surface/ pedant mounted.

Applications

- Parking garages
- Canopies
- Storage areas
- Outdoor aisles
- Gas stations
- Walkways
- Entryways





FEATURES

- Field-adjustable 3CCT & wattages to reduce SKU's
- New style design
- High efficacy up to 135LM/W
- AC120-277V/120-347V for options
- Perfect LED canopy lights to replace HID fixtures
- Rugged die cast aluminum housing for long last time using

PERFORMANCE SUMMARY

Model	Size (inch)	Watts	Efficacy	Volt	CCT	CRI	DIM	Beam Angle
CP02G-40	10.08*10.08*2.75	40W or 40/30/20W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	145°
CP02G-55	10.08*10.08*2.75	55W or 55/40/30W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	145°
CP02G-60	10.08*10.08*2.75	60W or 60/40/30W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	145°
CP02G-70	10.08*10.08*2.75	70W or 70/60/40W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	145°
CP02G-75	10.08*10.08*2.75	75W or 75/60/40W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	145°

Remarks: All above efficiency and lumens are subject to 5000K, please check IES files for accurate data
 CP02G-XXZ-X-YY, XX denote wattage, Z denote voltage, X denote control type, YY denote color temperature or 3 CCT.

PERFORMANCE

- IP Rating: IP65
- Sensor: Microwave motion sensor/ PIR sensor/ Bluetooth motion sensor
- LED Type: 2835
- THD: <20%
- Power Factor: ≥0.95
- Frequency: 50/60Hz
- Life Time >50,000Hrs
- Surge Protection: LN-PG :5KV, L-N:4KV
- Operating Temp.: -30°C to +50°C

CONSTRUCTION

- Lens Material: Polycarbonate
- Housing: Die-cast Aluminum
- Finish Colors: Black/ white/ brown


MOUNTING

- Surface mount
- Pedant mount





ASTRELIGHTS INC

PRODUCT APPEARANCE

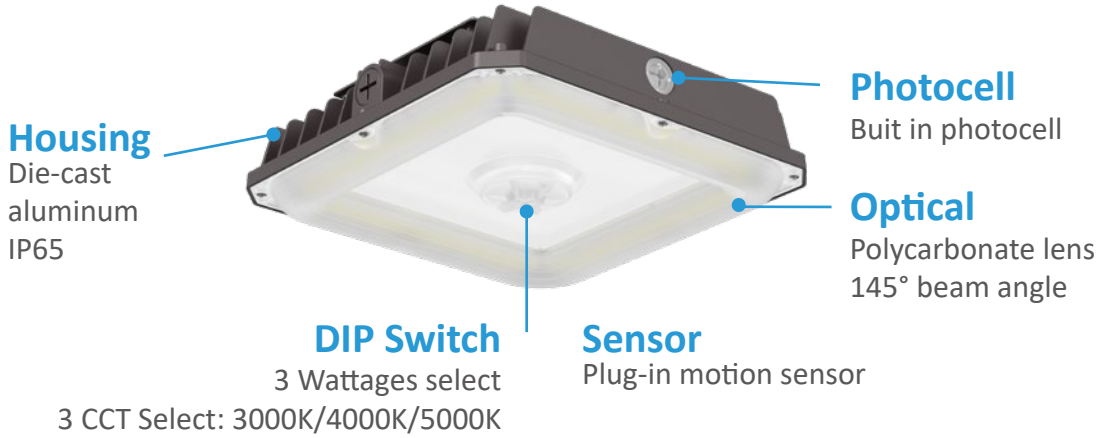

PRODUCT DIMENSION

(unit: mm & inch)

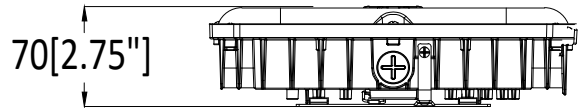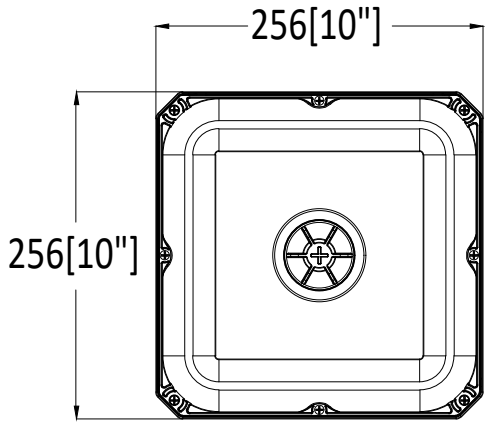

40W/55W/60W/70W/75W

PACKING INFO

Model	Product Dimension (INCH)	Carton Size (INCH)	Q'ty/CTN	Net Weight (LB)	Gross Weight (LB)	20GP (PCS)	40GP (PCS)	40HQ (PCS)
CP02G-40	10.08"X10.08"X2.75"	17.32X12.01X12.20	4	4.1	6.3	2468	4936	5996
CP02G-55	10.08"X10.08"X2.75"	17.32X12.01X12.20	4	4.1	6.6	2468	4936	5996
CP02G-60	10.08"X10.08"X2.75)	17.32X12.01X12.20	4	4.1	6.6	2468	4936	5996
CP02G-70	10.08"X10.08"X2.75)	17.32X12.01X12.20	4	5.1	7	2468	4936	5996
CP02G-75	10.08"X10.08"X2.75"	17.32X12.01X12.20	4	5.1	7	2468	4936	5996